

# TechWinder

## Innovation for Battery Solutions



### KEY FACTS

- For aluminum foil and copper foil
- Thickness range from 6  $\mu\text{m}$  - 350  $\mu\text{m}$
- Web width 500 mm - 1,400 mm
- Automatic splice at production speed
- With automatic pre-adjustment of the material - roll edge
- Equipped with edge control for the adjustment range of  $\pm 40$  mm
- Cross cut of the web by pneumatic serrated knife

In the manufacturing processes of cathodes and anodes for Lithium Ion Batteries, turret unwinder and turret rewinder type TechWinder are used before and after coating lines and calander systems.



The specially designed turret systems enable continuous operation without any restrictions in speed and productivity.

### Technical Data:


- ✓ **Up to 100 m/min.**  
Machine speed
- ✓ **Up to 1,200 mm**  
Roll diameter
- ✓ **Up to 1,600 kg**  
Roll weight

Contact us to prepare a detailed offer  
for your TechWinder!

## TechWinder for Battery Solutions

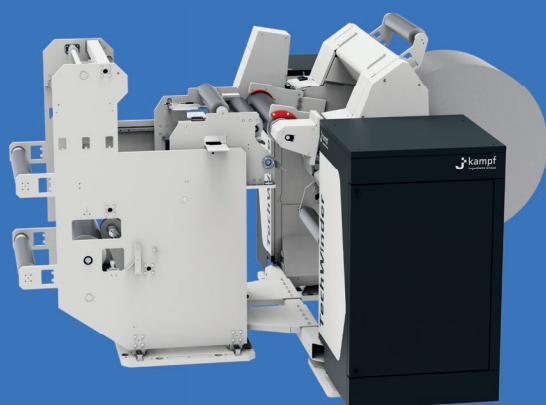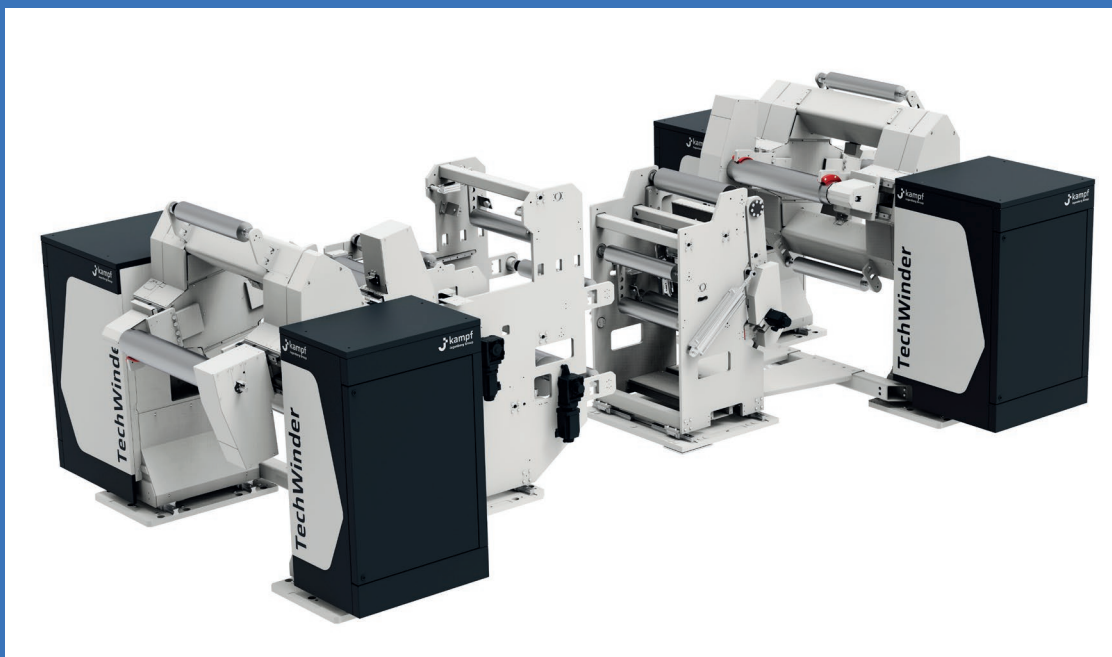

Turret Rewinder

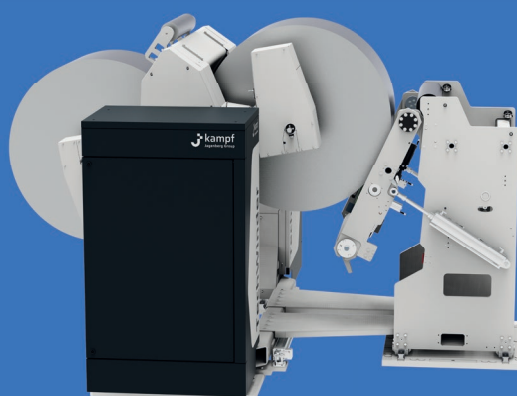

Turret unwinder with Auto Splice